

Uni-Pulse Defibrillator Analyser




Innovating Together



Uni-Pulse

Defibrillator Analyser

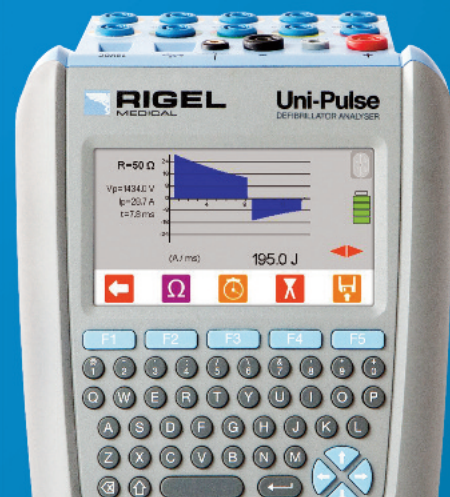

The Rigel Uni-Pulse is a portable and battery operated defibrillator analyser, designed to safely test the performance of all mono- and bi-phasic, standard and pulsating waveforms and AED applications. Control of the Rigel Uni-Pulse is through a menu driven colour GUI.

The Rigel Uni-Pulse is able to measure and display the following parameters;

1. Energy (peak voltage, peak current, pulse duration)
2. Cardiac Synchronisation Time
3. Charge Time
4. Display the curve

In addition, the Rigel Uni-Pulse, can simulate a variety of ECG signals to help establish the analytical function of AED's and the performance of the waveform detection circuits.

The Rigel Uni-Pulse has internal memory to enable asset management data to be collected including but not limited to:

- Asset Details (Site / Location / Make / Model)
- Test results
- Discharge waveform

Computer communication is via Bluetooth and USB. This communication facility can be used to download test results.

Tests on Defibrillators

- Energy Discharge (including peak voltage, peak current and pulse duration)
- Cardiac Synchronisation Time
- Charge Time

Energy Discharge

This test measures the Energy output of the defibrillator. In doing so the Peak Voltage (upto 6000V) and peak Current (up to 100A) is recorded. Energy is displayed in Joules. A typical discharge lasts for up to 10mSec and is the result of a discharge of a large capacitor. The discharge time is similar to the RC time (R= 50Ω load)

Cardiac Synchronisation

A defibrillator is required to discharge at the correct moment of the QRS complex in order to avoid the vulnerable period (T-Wave). When using the Uni-Pulse in Cardiac Synch mode, the Uni-Pulse will output an NSR waveform. The defibrillator will synchronise on the R wave in the QRS complex. The Uni-Pulse will measure the time between this point and the actual discharge. Time is displayed in mSec. Typical between 10 – 50mSec.

Key Features

- Compatible with mono-, bi-phasic and pulsed waveforms
- Reliable and non-inductive test load of 50Ω
- 12-lead patient simulator with ECG hi output
- Portable and rugged enclosure
- Colour graphic user interface
- Display of defib pulse
- Intuitive user interface
- Battery operation
- Data download

Interfaces

- **Navigation**
via dedicated fast keys and up / down navigation keys
- **Display**
Full graphic Colour LCD, white backlit, 1/4 VGA resolution
- **External**
2 x 4 mm (Sternum / Apex – Paddle Adaptor Box)
1 x 2 mm sensing lead
10 x 4 mm patient simulator output
Mains Charger inlet
USB outlet
ECG high level output

Power Source

- Universal power supply (230 / 110V +/-10%, 50/60Hz)
- Internal battery pack 12v/2400mAh Nickel Metal Hydride

Charge time

This test records the recovery time of battery operated defibrillators and is a requirement from IEC 60601-2-4. The standard requires the defib to be able to perform 10 full tests at maximum energy and measure the charge time at the 10th charge cycle. The battery should be such that its capability is the charge to maximum power within the set limit.

Product Features

Compatible with ALL defib output waveforms

The Uni-Pulse is able to accurately test all defib wave forms from older mono-phasic to more recent Bi-phasic wave forms and in particular the pulsating and modulating waveforms.

Reliable and non-inductive test load of 50Ω

The Rigel Uni-Pulse utilises non-inductive load resistors which are rated to dissipate up to 10 x 360 Joules discharges within a 10 minute period. This test can be used in conjunction with the charge test, a requirement from IEC 60601-2-4.

Portable and rugged enclosure

The Rigel Uni-Pulse is in a elegant, ergonomic and portable enclosure. This provides the user with a highly portable and rugged design.

Graphic user interface.

The User-Interface of the Rigel Uni-Pulse consists of a full graphic, colour LCD display.

An intuitive GUI provides instant and clear overview of measurement data and navigate through the various screens. This ensures that the operation of the Uni-Pulse is easy to follow, reduces the requirement for training and aids the customer's ownership.

Intuitive User Interface

The operation of the Rigel Uni-Pulse requires the minimum of key presses to aid the reduction of test times and complexity.

Dedicated fast keys for immediate tests / simulations as well as download and view data are also included.

The colour GUI makes use of clear icons to

help the user to navigate and operate the different functions.

Multi-lingual firmware is available to meet local requirements.

Rechargeable Battery operation

The Rigel Uni-Pulse is fitted with a rechargeable battery pack allowing the Uni-Pulse to operate without mains required during tests.

Download/Upload data

The Rigel Uni-Pulse is able to communicate to an external bluetooth printer and a PC / Laptop via USB.

Download contains all stored test data including waveform, measured values. [energy, peak voltage / current, cardiac synch time, charge time].

Supplied Accessories

- AC power supply (110/230V AC)
- ECG Snap Adapters (set of 10)
- Instruction Manual
- Utility disc
- Carry case
- USB lead

Optional Accessories

- Paddle adaptor box (Apex / Sternum)
- AED Paddle Adapters
- Med-eBase
- Barcode scanner with embedded Blue Tooth
- Printer (BT)

Variations

- The unit is available with a universal power supply including connectors for UK / Europe and USA. Firmware allows for multi lingual menu's.

Languages

- English (Default)
- French (Default)
- German (Default)
- Spanish (Default)
- Italian (Default)

SPECIFICATIONS

Serviceability

Warranty:	2 Years (when calibrated at Seaward)
Calibration interval:	1 Years

Environmental

Operating	0° - 40°C
Storage environment	-15° - +60°C
Environmental Protection	IP 40

Safety

Electrical:	BS EN61010-1:2010.
Manufacturer's Certification	CE
EMC:	BS EN61326-2006.

Test Specification

Energy Measurement

Load Resistance:	50 Ohms ± 1% non inductive
Range (Low):	0 – 199.9 Joules.
Resolution:	0.1 Joules.
Accuracy:	± 1% of Reading ± 0.1 Joule.
Range (High):	200- 600 Joules.
Accuracy:	± 1% of the Reading ± 1 Joules.
Voltage:	0-6000 volts
Maximum Current:	0-120 Amp,
Sampling rate	100kHz sample frequency

Cardio version (Sync.) Time

Measurement:	From peak of the simulated ECG R-wave to the peak of the defibrillator output pulse.
Range:	-250 to +250 ms.
Accuracy:	1% of Full Scale ± 1 ms.

Discharge Waveform Output

Stored:	Waveform is captured on screen and stored in memory for download / print. Including peak voltage / peak current pulse duration.
---------	---

Charge Time

Measurement is initiated by pressing the function key and simultaneously charging the defibrillator. Charge time recorded after the defibrillator has discharged across the 50Ω resistor.

ECG Arrhythmia Simulator

ECG full 12 lead simulation including high level output
Wave forms Normal Sinus Rhythm (NSR), ST Elevation, ST Depression, Myocardial Infarction, Tall T
Rate 20 – 300 BPM (1 BPM resolution)

Also available



288+

Electrical Safety Analyser

Features include:

- Light, hand-held, battery operation
- Conform IEC 62353 / 60601/ VDE 0751 / NFPA-99 / AS-NZS 3551
- Memory for up to 10,000 devices
- Bluetooth communication
- Full, semi automatic & manual tests



UNI-Sim

Vital Signs Simulator

Features include:

- Light, hand-held, battery operation
- Combined NIBP, SpO2 and Patient Simulator in one unit
- User configurable simulations
- Full synchronised functionality
- Memory for up to 10,000 devices



Performance waveforms

Sine, Square, Triangle, and Pulse
 Pacer Waveforms Synchronous Atrial, Asynchronous Atrial
 Pacer Only Pacer Pulse rate 60 BPM, Ventricular Pacer rate 70 BPM, Atrial
 & Ventricular Pacer Heart rate 70 BPM, R Wave Detection

Arrhythmia Waveforms

Atrial
 Sinus Arrhythmia (SA), Missing beat, Atrial Flutter (AFLT),
 Atrial Fibrillation (AFB), Paroxysmal Atrial Tachycardia (PAT),
 Junctional Premature Contraction

Atrial Conduction
 First Degree AV Block, Second Degree AV Block - Mobitz I,
 Second Degree AV Block - Mobitz II, Third Degree AV Block,
 Right Bundle Branch Block (RBB), Left Bundle Branch Block
 (LBB), Left Anterior Hemiblock

Ventricular

Premature Ventricular Contraction - Intermittent Premature
 Ventricular Contraction – Continuous, Bigeminy, Trigeminy,
 Ventricular Flutter (VFLT), Ventricular Fibrillation (VFB), Ventricular
 Tachycardia (VTC), Right Focal PVC.

Waveform Output:

Low Level 12 Lead ECG and on Paddles
 Hi Level Output Jack

Accuracy:

Rate ± 1 %
 Amplitude ± 2% (LA-LL), ± 10% (Paddles)

Bluetooth / USB Output

A computer interface is available to print test results or to save them on a PC. The test results can be saved directly to a PC software (Med-eBase).

All displayed values including wave form are stored in the internal memory.

Power Requirements

12v/2400mAh Nickel Metal Hydride battery pack.
 110/230V AC; 48 to 66 Hz, 35 VA power supply.

Also available



**Uni-Therm
 ElectroSurgical Analyser**

Features include:

- IEC 60601-2-2 compliant
- Power distribution from 5-5115Ω
- HF leakage test
- Return plate security test (Rem)
- Onboard data storage



**Multi-Flo
 Infusion Pump Analyser**

Features include:

- IEC 60601-2-24 compliant
- Instant flow and pressure
- Compatible with all infusion devices
- On-screen trumpet curve
- Onboard data storage



Product Features Key

	Bluetooth compatible		Battery powered
	Mains powered		Med-eBase compatible
	Barcode scanner		Med-ekit compatible

Innovating Together

Storage and Recall

Memory	100 tests plus graphs
Output	CSV and SSS format

Temperature

Operating	15 °C to 40 °C
Storage	0°C to 50 °C

Display

LCD	colour graphic display 1/4" VGA
-----	---------------------------------

Dimensions

225 mm x 145 mm x 95 mm (L x W x H)

Weight

1.5 Kg

Available accessories**Barcode Scanners**

Speed up your testing procedures and reduce data entry errors with a dedicated range of barcode scanners. Simply "scan and test" with Rigel's range of barcode scanners. Compatible with all conventional barcode systems, the scanners are available in Bluetooth & battery operation or RS232 variants.

**Test 'n' Tag Elite**

Rigel Medical offer a unique range of printers to increase traceability onsite. From dedicated barcode label and results printers to the popular Test 'n' Tag Elite printer which encompasses all. Available with durable and tamper-proof labels; you can choose from mains or battery and bluetooth operated printers. There is always a solution to meet your requirements.

**Med-eBase Software**

Rigel's Med-eBase is a universal software package that not only allows you to download and manage test results, it also allows for easy scheduling of work-orders, configuration of test equipment, comparing of data, trend analyses and creation of customised test certificates to give you flexibility in the way you want to manage your assets.

For orders or enquiries call
+44 (0) 191 587 8730

Rigel Medical, Bracken Hill,
South West Industrial Estate,
Peterlee, County Durham
SR8 2SW United Kingdom

Fax: +44 (0) 191 586 0227
Email: sales@rigelmedical.com
Web: www.rigelmedical.com